

ORDER

SL 60s

Position
_____ / _____

Required delivery week: _____

1. Number of units
_____ pieces

2. Stacking
 Inside
 Outside

3. Panel
 Top hung
 Floor mounted (standard)

4. Number of panels (inside view)
 _____ left direction
 _____ right direction

5. Glass
 with: _____
 prepared for _____ mm

6. Cleaning pin
 (Installation of cleaning pin only possible with top hung systems)

7. Surface profile + panel connector
RAL _____
 or
Profile Eloxal

 + Panel connector
RAL _____

Flat handle: (standard)
RAL 9016 9006
 9007 8077
 Special colour (additional charge)
RAL _____

Client:

Tel: _____ **Fax:** _____




Contact person _____

Ref:


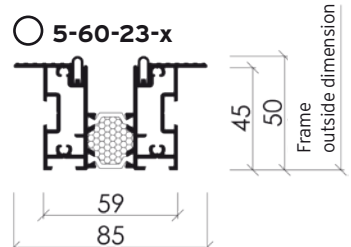
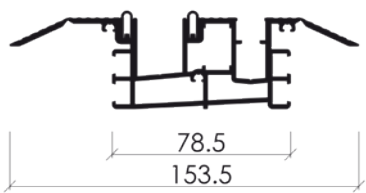
Quotation number: _____

Delivery address (if different to client):

8. Hardware types **ATTENTION!** For **parapet installations:** Handle height from frame underside _____ mm

<input type="radio"/> Flat handle on inside without lock (standard) 	<input type="radio"/> Flat handle inside/outside with profile cylinder (only possible with pair panel) 	<input type="radio"/> Lever HEWI handle inside/outside with key cylinder (only possible on first opening swing panels) 
--	---	---

9. Floor track options (Examples are to be found on www.solarlux.com)

<input type="radio"/> 5-61-01-x  Inside opening: Drainage <input type="radio"/> yes <input type="radio"/> no Outside opening: No factory installed drainage	<input type="radio"/> 5-60-23-x  No factory installed drainage
	<input type="radio"/> 5-71-25-x  No factory installed drainage

10. Drawing

Elevation from inside

External frame size (with): _____ mm

External frame size (height): _____ mm

number of panels and opening direction

Plan view

Outside _____

Inside _____
 panel shown in open position (stacking position)